


1 2 3 4 5 6

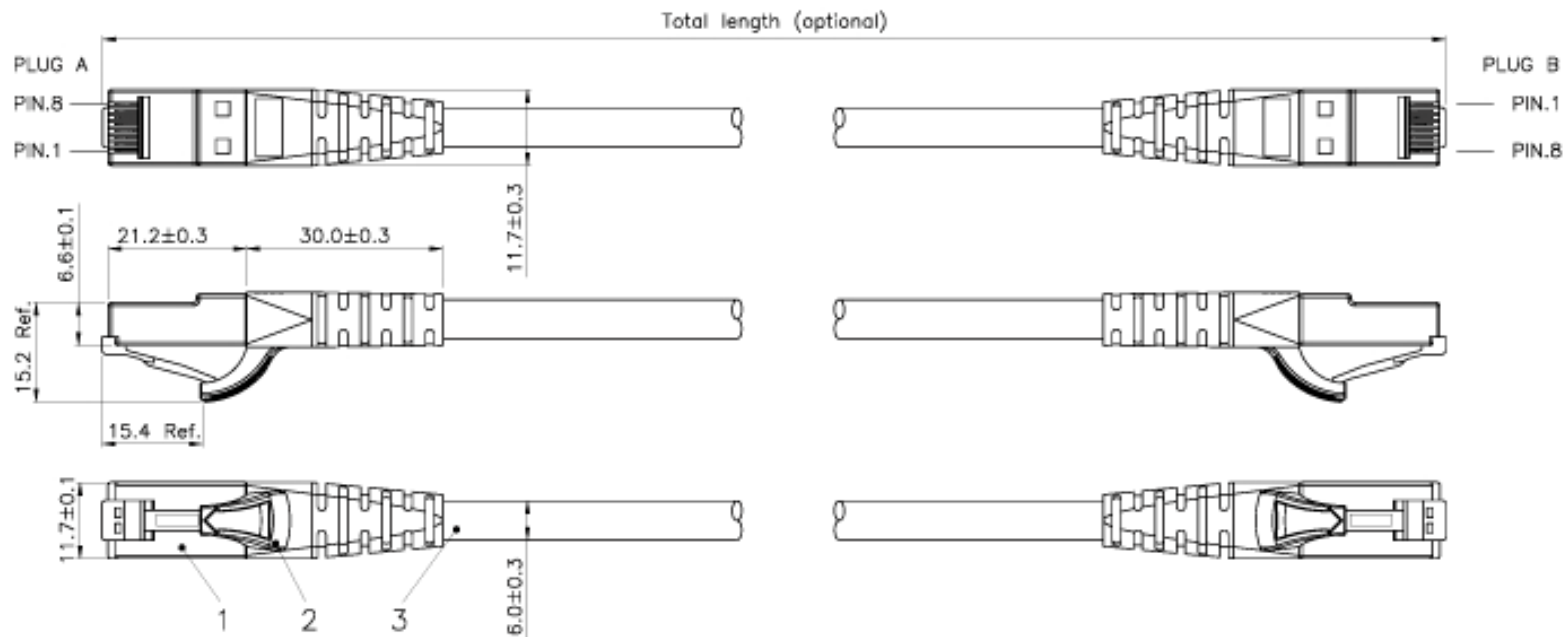

Specification :

Material :

1. RJ45 Plug : (P/N : PU8850)
 - 1-1. Housing : Polycarbonate, UL 94V-2, Transparent color.
 - 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - 1-3. Contact finished : Min. 50 micro-inch Gold plated.
2. Narrow PVC Molded.
3. Cable : UTP Unshielded and Twisted, 4 pair Stranded wire UL material approved. 24 AWG conductor and PVC jacket.

Remark : URT46E4U/XXX4XX
(1) (2)(3)

- (1) XXX : Length
50C=0.5meter, 01M=1meter, 03F=3feet.
- (2) X : Wiring
A=T568A, B=T568B, C=T568A & T568B combination
- (3) X : Jacket Color
0=Black(RAL9011), 2=Red(RAL3031), 3=Orange(RAL2003),
4=Yellow(RAL1021), 5=Green(RAL6029), 6=Blue(RAL5015),
7=Purple(RAL4005), 8=Gray(RAL7035), 9=White(RAL9010).

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	14.MAR.2007	Michelle
	CHECK	14.MAR.2007	Magic
	APPROVAL	14.MAR.2007	Magic
	DATE	NAME	ITEM NO.: URT46E4U/XXX4XX
SCALE	1/1 (A4)	UNIT	mm
DRAWING NO. URT46E4U-XXX4XX(SA2)		DES.: C6 UTP w/ Protector Patch Cord	
DRAWING CLASSIFICATION		S	SHEET 1 OF 1



1 2 3 4 5 6 10cm